

VM36

The Toolco Range of Turret Mills

Compact Mid Range Turret Mill

FEATURES

- Manufactured to the highest accuracy and rigidity
- High precision spindle bearings
- Precision ground quill
- Precision ground table and slideways
- Equipped with fine downfeed
- One shot lubrication system
- Belt change head

- 2 Axis DRO available as optional extra




Fine downfeed

- Spindle guard removed for clarity in photograph

STANDARD EQUIPMENT SUPPLIED

- Equipped with manual fine downfeed
- Longitudinal table power feed
- One shot lubrication system
- Full coolant system with splashtray
- Halogen worklight
- Interlocked spindle guard
- Manual and parts list


Huge range of accessories available for all our Mills

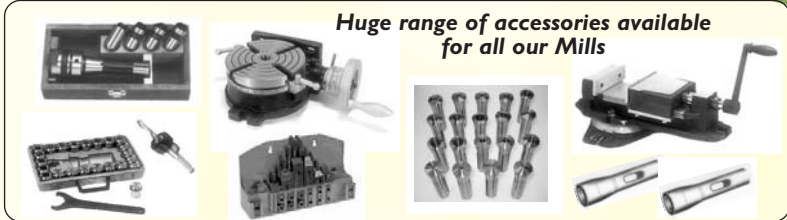

SPECIFICATION

Spindle Taper	R8
Spindle Speed Range – 10 speed model	240 – 1550 rpm
Table Size	200 x 910mm (8 x 36")
Quill Diameter	86mm (3 3/8")
Spindle Travel	127mm (5")
Spindle Distance to Table (max)	350mm (13 3/4")
Spindle Distance to Column (max)	400mm (15 3/4")
Spindle Distance to Column (min)	150mm (5 1/4")
Head Swivels (left to right)	90 deg
Overarm Travel	250mm (10 1/2")
Knee Travel	350mm (14")
Table Travel (manual)	610mm (24mm)
Size of Tee Slots	16mm (5/8")
Motor Size	1 1/2 hp
Standard Electrics	415 volts 3 phase
Approx Net Weight	670 kgs
Approx Dimensions	1397 x 1320 x 1955mm

- Longitudinal powerfeed as standard equipment

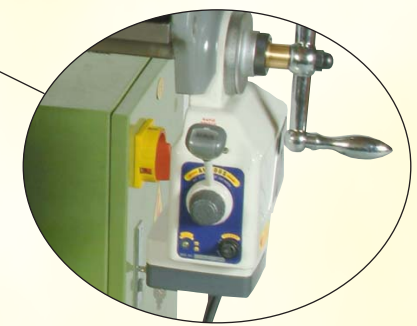

Full coolant system with splash tray

NOTE: General dimensions and specification may be subject to minor variations and should be used for guidance only.